

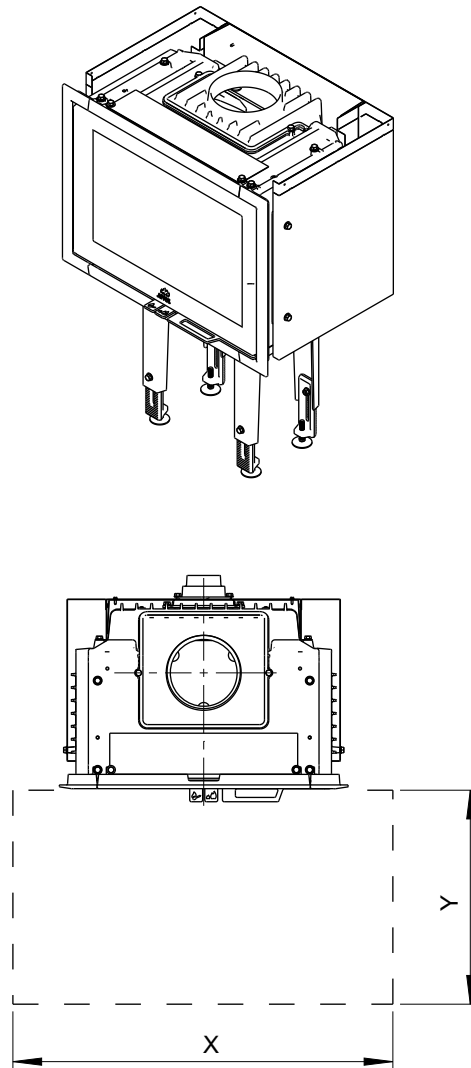
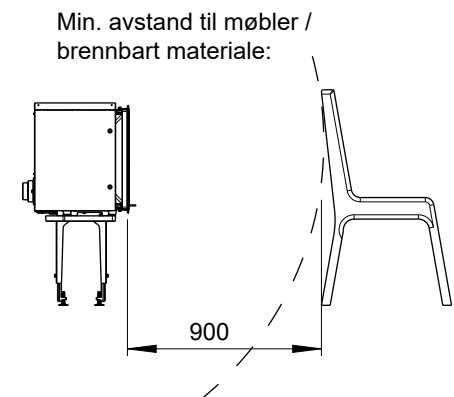
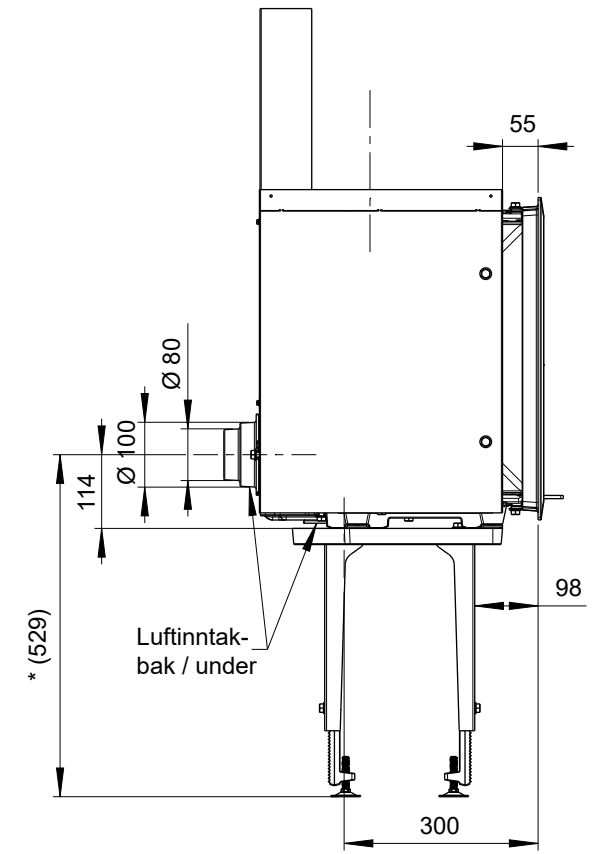


Fig. 1 a

Produkt:
Jøtul I 520 F

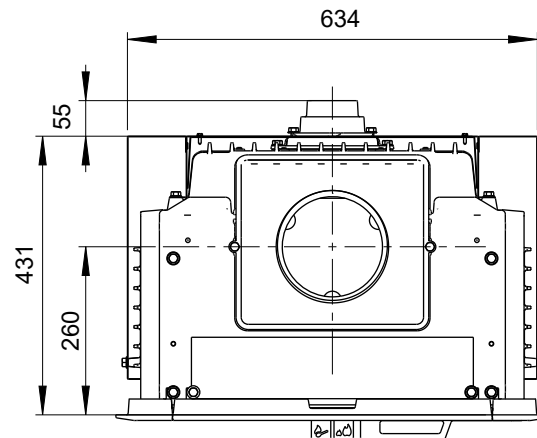

Min. mål gulvplate X,Y:
I henhold til nasjonale lover og regler

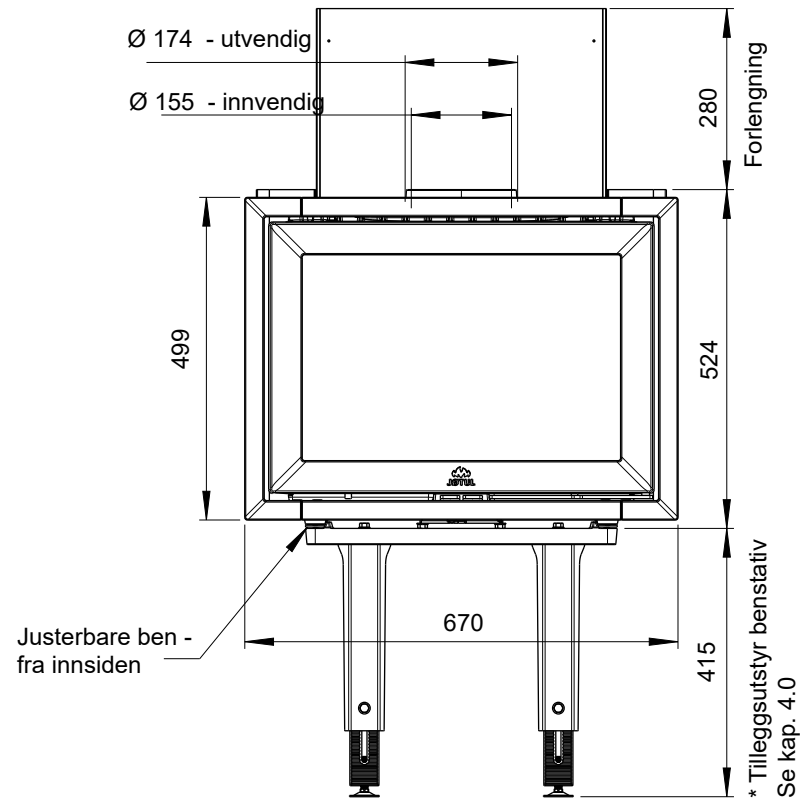

Min. avstand til møbler /
brennbart materiale:

Fig. 1 b

Produkt:

Jøtul I 520 FR

Jøtul I 520 FL

Jøtul I 520 FRL










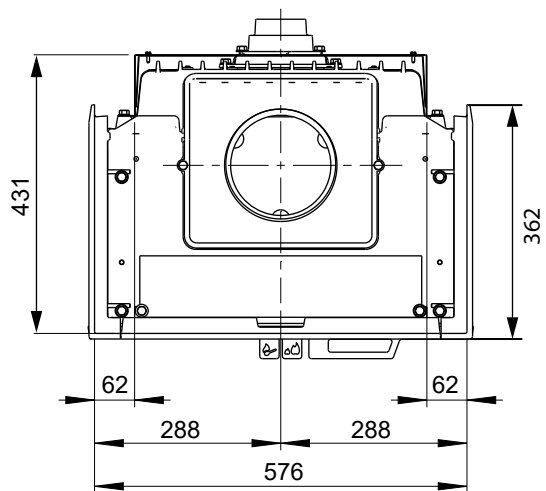



Fig. 1 c

Jøtul I 520 F

Min. avstand til brennbar vegg beskyttet av godkjent brannmur

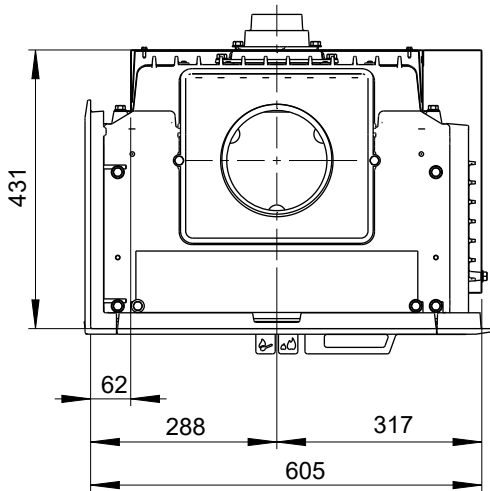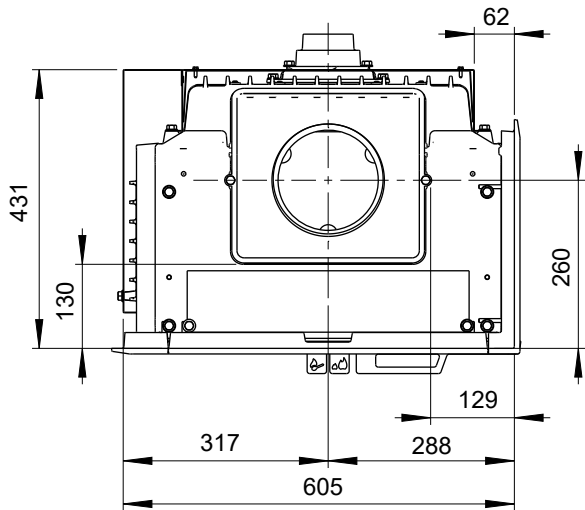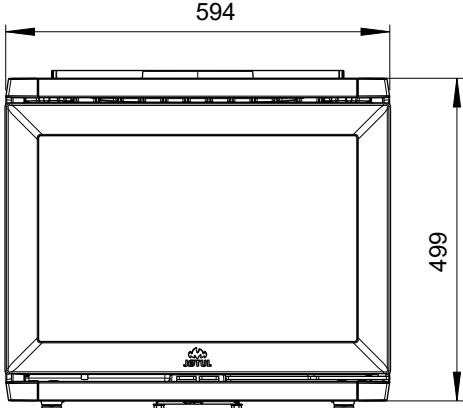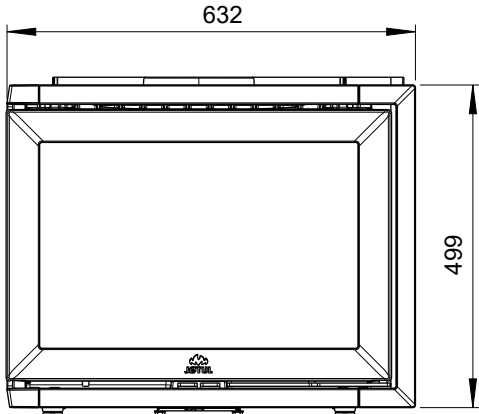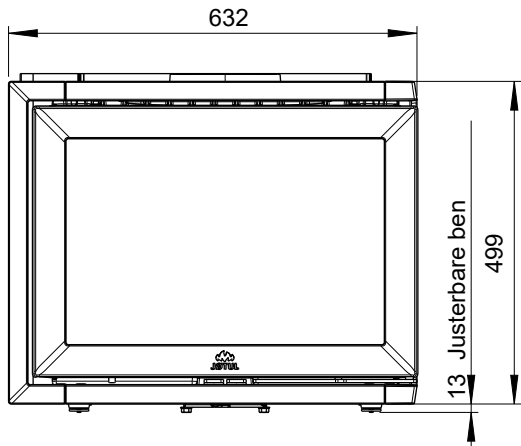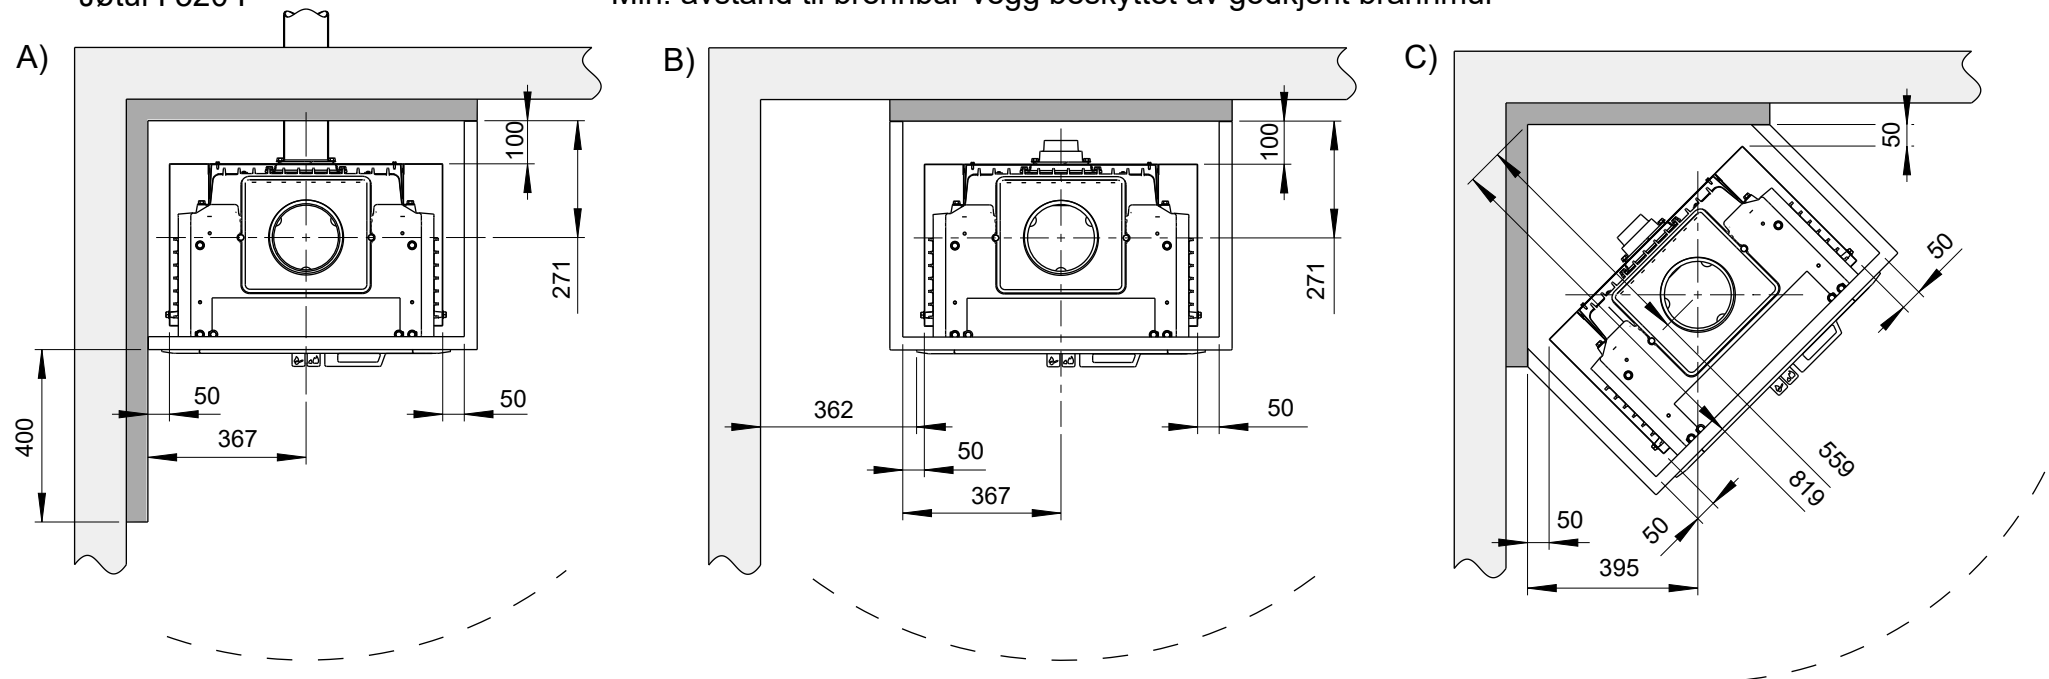

Jøtul I 520 FR:

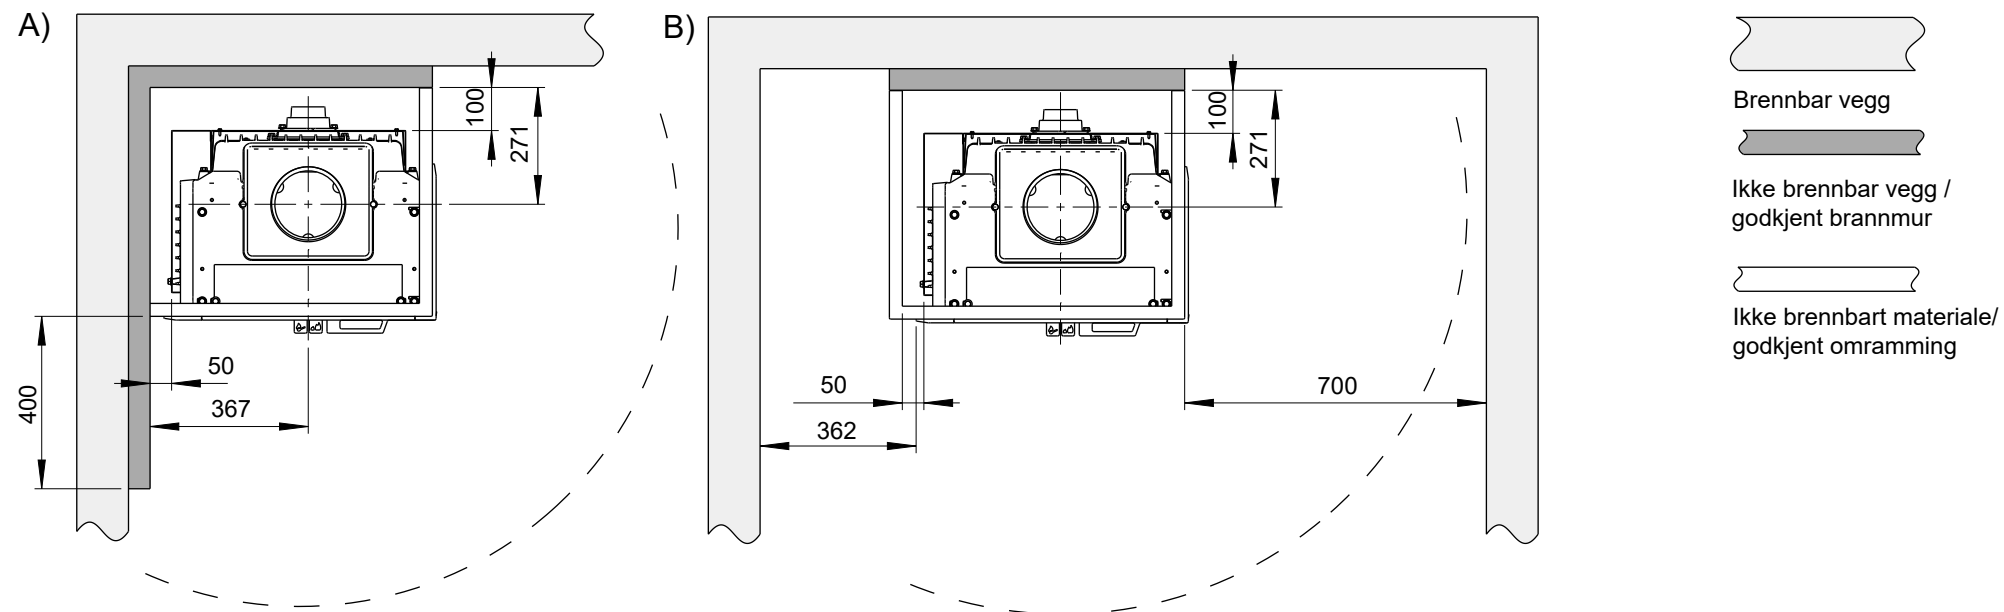


NB ! Min. avstander forutsetter halvisolert skorstein eller skjermet røykrør ned mot produktet.

900143-P01


Fig. 1 d

Jøtul I 520 FL

Min. avstand til brennbar vegg beskyttet av godkjent brannmur

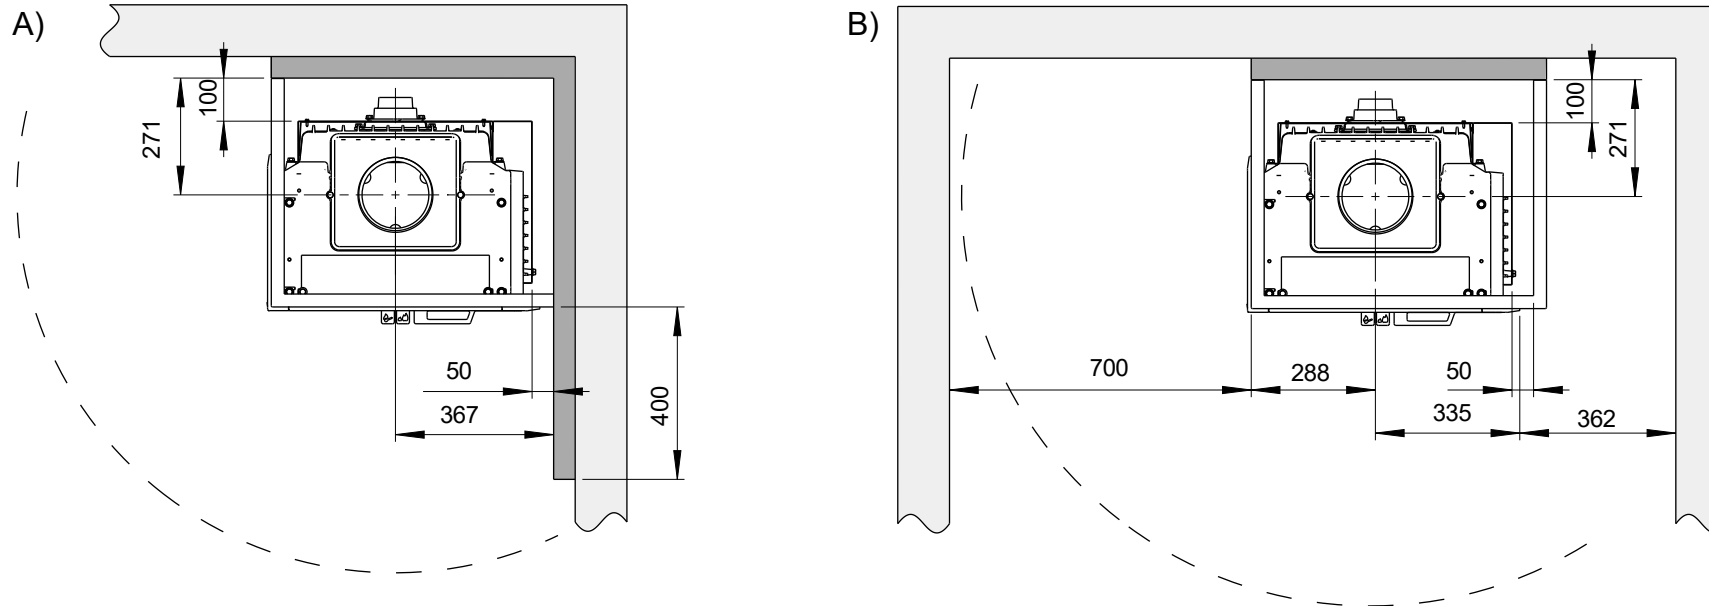

Jøtul I 520 FRL

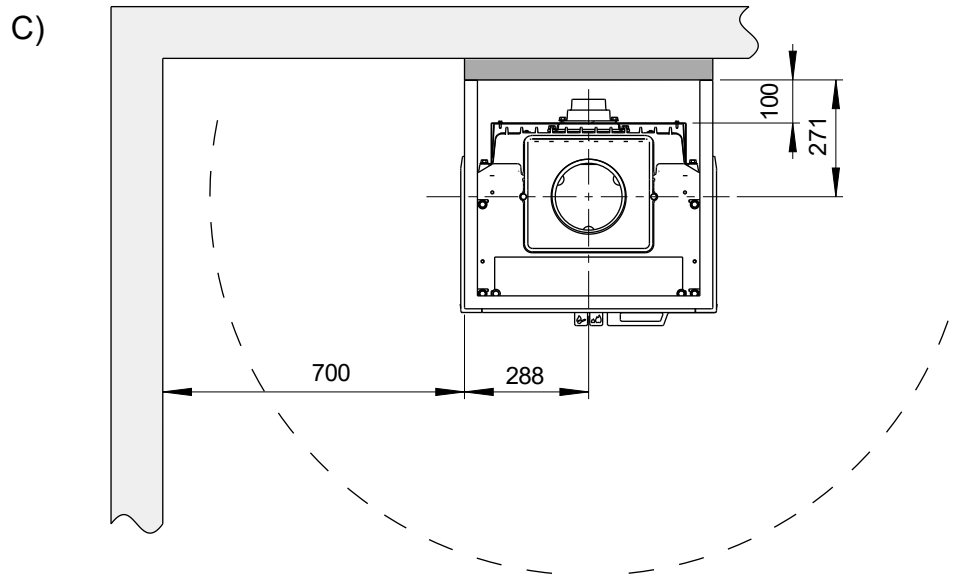

Brennbar vegg

Ikke brennbar vegg /
godkjent brannmur

Ikke brennbart materiale /
godkjent omramming

NB! Min. avstander forutsetter halvisolert skorstein eller skjermet røykrør ned mot produktet

900143-P01

Min. avstand til brennbart tak / gulv

Jøtul I 520 F / I 520 FR / I 520 FL - alt. A), C)

Hjørneoppstilling

The diagram illustrates the corner installation of a Jøtul I 520 F / I 520 FR / I 520 FL fireplace. It includes a side elevation and a perspective view of the fireplace unit. Key dimensions and requirements are as follows:

- Side Elevation Dimensions:**
 - Top clearance from combustible ceiling/floor: min. 20 mm (gap), min. 400 mm (solid).
 - Back clearance from non-combustible wall: min. 428 mm (to frame), min. 300 mm (to frame with min. 100 mm ash tray).
 - Clearance from alternative air intake: 529 mm.
 - Base width: 231 mm.
 - Back panel angle: 35°.
 - Back panel area: min. 750 cm².
- Front View Dimensions:**
 - Clearance from non-combustible wall: min. 500 cm².
- Material Requirements:**
 - Brennbar vegg (Combustible wall): Indicated by a light grey shaded area.
 - Ikke brennbar vegg / godkjent brannmur (Non-combustible wall / approved fire wall): Indicated by a dark grey shaded area.
 - Ikke brennbart materiale/ godkjent omramming (Non-combustible material / approved surround): Indicated by a white area.
- Notes:**
 - * For alternativ avstand, se avsnitt 4.1 (For alternative clearance, see section 4.1).

NB! Min. avstander forutsetter halvisolert skorstein eller skjernet røykrør ned mot produktet.

Min. avstand til brennbart tak / gulv

Jøtul I 520 F / I 520 FR / I 520 FL / I 520 FRL - alt. B)

Rettveggssoppstilling - NB! Ikke for hjørneoppstilling

The diagram illustrates the installation requirements for the Jøtul I 520 FRL fireplace. It includes a side view with dimensions and a front view showing the fireplace unit. Key dimensions and requirements are as follows:

- Side View Dimensions:**
 - Height: 529
 - Width: 231
 - Clearance to ceiling/floor: min. 400
 - Clearance to non-combustible wall: min. 750 cm²
 - Clearance to non-combustible material/frame: min. 428 (to frame), min. 300 (to frame with min. 100 mm ash tray), * For alternative clearance, see section 4.1
 - Clearance to non-combustible material/frame (alternative): min. 500 cm²
- Material Requirements:**
 - Brennbar vegg (Combustible wall)
 - Ikke brennbar vegg / godkjent brannmur (Non-combustible wall / approved fire wall)
 - Ikke brennbart materiale/ godkjent omramming (Non-combustible material / approved framing)

900143-P02